

Quick start guide

IPPC-15-6000 | IPPC-22-6000



PRO DVX | ALWAYS

Please check the website or scan the QR-code for more product information.
www.prodvx.com/support

PRO DVX | ALWAYS

The information in this document is subject to change without notice. © 2022 ProDVX Europe B.V. All rights reserved.

IPPC-15-6000 | IPPC-22-6000

Quick start guide

This package contains:



Panel PC



Quick start guide



DC power adapter 12 V
Power plugs for Europe, UK & US




Tools necessary
but not included



*Please note that it is preferred not to use power tools to attach the device to the mount or stand.

How to start:


- Step 1: Take contents out of the box, make sure all components are present.
- Step 2: Install wall/glass mount or desk stand using manual screw driver, check designated mount/stand manual for instructions.
- Step 3: Connect to power supply via DC power adapter.
- Step 4: Connect to Wi-Fi or LAN.
- Step 5: If applicable, install and configure preferred application.

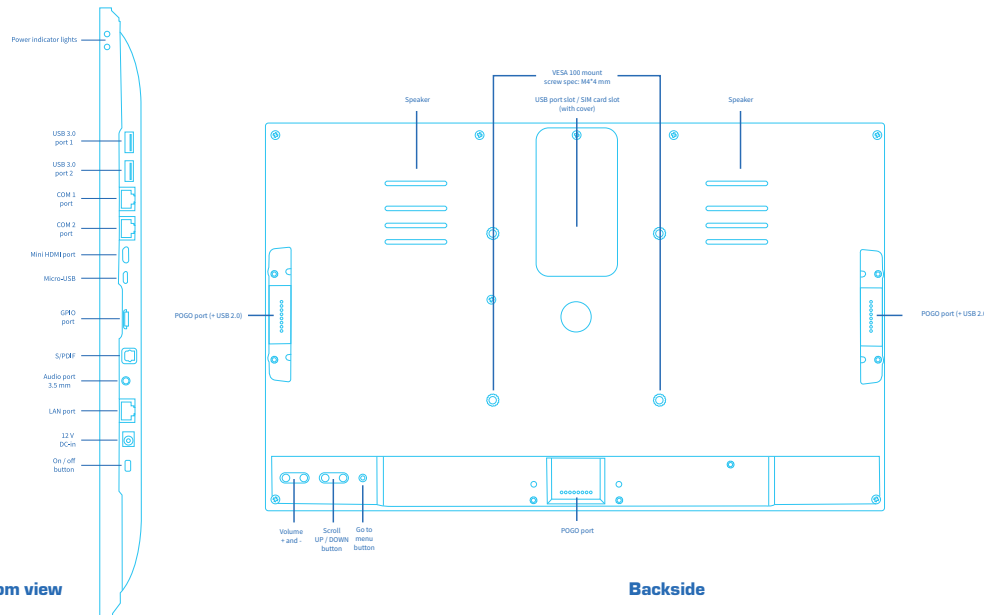


Please note that the drawings above feature the IPPC-15-6000. The IPPC-22-6000 differs slightly from the drawings above,

Quick connection settings


Step 1: Plug in power cable to turn on display. To connect to Wi-Fi, navigate to the bottom toolbar and click the globe icon as seen in the image below.

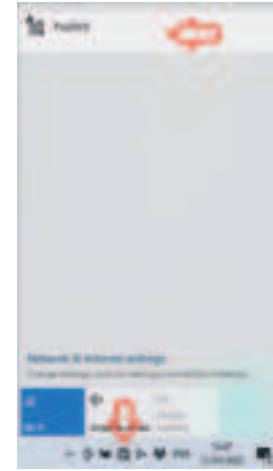

Step 2: Select the desired Wi-Fi network, click "connect" and fill in credentials to connect.

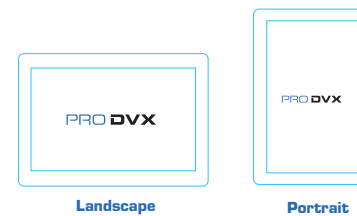

Optional accessories

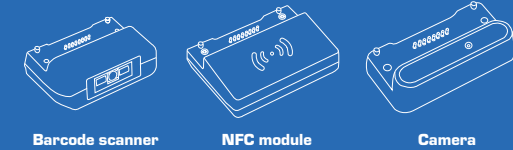

Caution:
Please note this product contains a small clock battery. Please return the product to a certified repair centre for proper replacement of the battery; battery disposal can be dangerous.

WARNING:
Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE:
This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area can cause harmful interference, in which case the user will be required to correct the interference at their own expense.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Europe/UK – EU/UK Declaration of Conformity
This device complies with the essential requirements of the Radio Equipment Directive (2014/53/EU). The following test methods have been applied in order to prove presumption of conformity with the essential requirements of the Radio Equipment Directive. This equipment is compliant with Class A of EN 55032. In a residential environment, this equipment may cause radio interference.

Correct Disposal of this product.
This marking indicates that this product should not be disposed of with other (household) waste. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the reseller where the product was purchased. They can take this product for environmentally safe recycling.

"FCC & CE RF Radiation Exposure Statement Caution: To maintain compliance with the FCC & CE's RF exposure guidelines, the product must be placed at least 20 cm from nearby persons."

The guaranteed environmental specifications for the ProDVX Display and accessories are:
- Operating temperature: - 0 - 40 °C / 32 - 104 °F
- Storage temperature: - 10 - 55 °C / 14 - 131 °F
- Relative humidity: 10 - 85% at 40 °C / 104 °F non-condensing